



version 1.0

WP
Winpact

2017 BROCHURE

Cultivation Incubator



WS-200 / WS-201



NEW Winpact Shaker

- Various speed settings from 20-500 rpm
- Equipped with a robust brushless DC motor for economical and noiseless operation
- Two modes of operation available: programmable or continuous
- Versatile accessories available for advanced culturing solutions
- Auto detection and power shutdown to platform weight imbalance or belt breakage

Cat. No.	WS-200	WS-201
Description	Winpact Orbital Shaker	Winpact Orbital Anti-moistured Shaker
Platform size	46 x 46 cm	
Shaking orbit	19 mm	
Speed range	20-500 rpm	
Speed increment	1 rpm	
Timer	999 (hr) : 59 (min) / Continuous	
Display	3.5" Color TFT LCD screen	
Dimension (WxLxH)	Approx. 52 x 62 x 21 cm	
Rated Voltage	100-240V~, 50 / 60Hz, 2A	
Loading Capacity *	Approx. 500 rpm: 5 kg, 250 rpm: 30 kg	
Anti-moistured	N/A	Yes

* Different flask will reduce the maximum speed.



NEW Winpact Shaking Incubator

- Special designed drainage channel protects the motor and inner circuitry from accidental spills
- Multiple early error-detection mechanisms ensure safety of operator and cultured cells in an event of device malfunctions
- Lab-proven superior temperature uniformity
- A wide selection of racks, holders, sticky pads and accessories provides all-ranged compatibility to cell cultivation labwares
- Automatic system shutdown in the event of system over-heating
- Sensitivity adjustable G-sensor with warning embedded for imbalance weight detection
- Programmable or continuous mode for personnel operation
- Brushless DC motor provides long and quiet operation, durable and maintenance-free usage
- Hermetic chamber design significantly reduces operation noise and enhances precise temperature control
- 2-point temperature calibration ensures high temperature performance


SI-200



Cat. No.	SI-200
Platform size	46 x 46 cm
Shaking orbit	19 mm
Speed range	20-500 rpm
Speed increment	1 rpm
Communication port	RS-485
External temperature probe	PT-100
Heating temperature range	Ambient +5°C to 65°C
Power	600W
Temp accuracy and uniformity	± 0.25°C at 37°C
Timer	999 (hr) : 59 (min) / Continuous
Display	3.5" Color TFT LCD screen
Dimension (W x L x H)	Approx. 59 x 82 x 53 cm



Acrylic lid for clear viewing and easy access

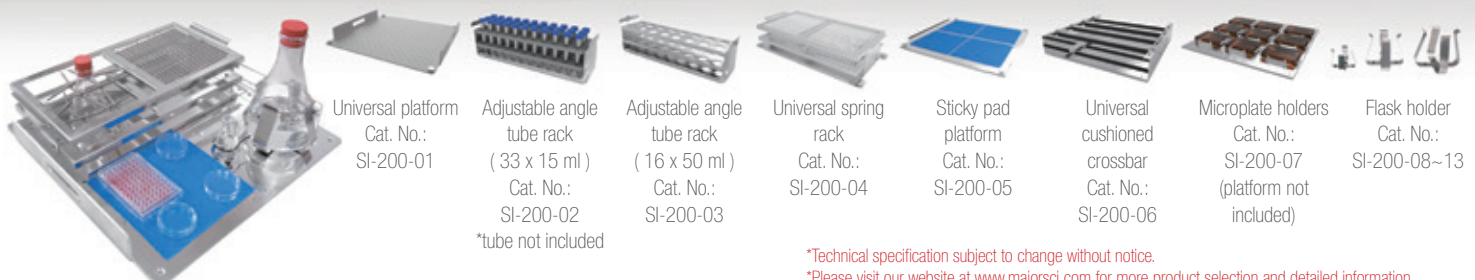

*Technical specification subject to change without notice.

*Please visit our website at www.majorsci.com for more product selection and detailed information.

US Office

19959 Sea Gull Way
Saratoga, CA 95070
U.S.A.
T/ +1-408-366-9866
F/ +1-408-446-1107

Taiwan Office



No. 37, Wuquan 5th Road,
Wugu Dist., New Taipei City 24888
Taiwan
T/ +886-2-2298-1055
F/ +886-2-2299-7871

Shanghai Office

Room 612, International business exhibition center,
9300 Hunan Road, Pudong, Shanghai, China
National toll-free No.:400-823-9177
T/ +86-21-50795277
F/ +86-21-50795277

India Office

No.12-13-104, St. No.3, Lane No.1,
Tarnaka, Secunderabad - 500017
Telengana, India
T/ +91-40-27001515
F/ +91-40-27001515



www.majorsci.com
info@majorsci.com